


XC3 Installation Drawing – Issue 1

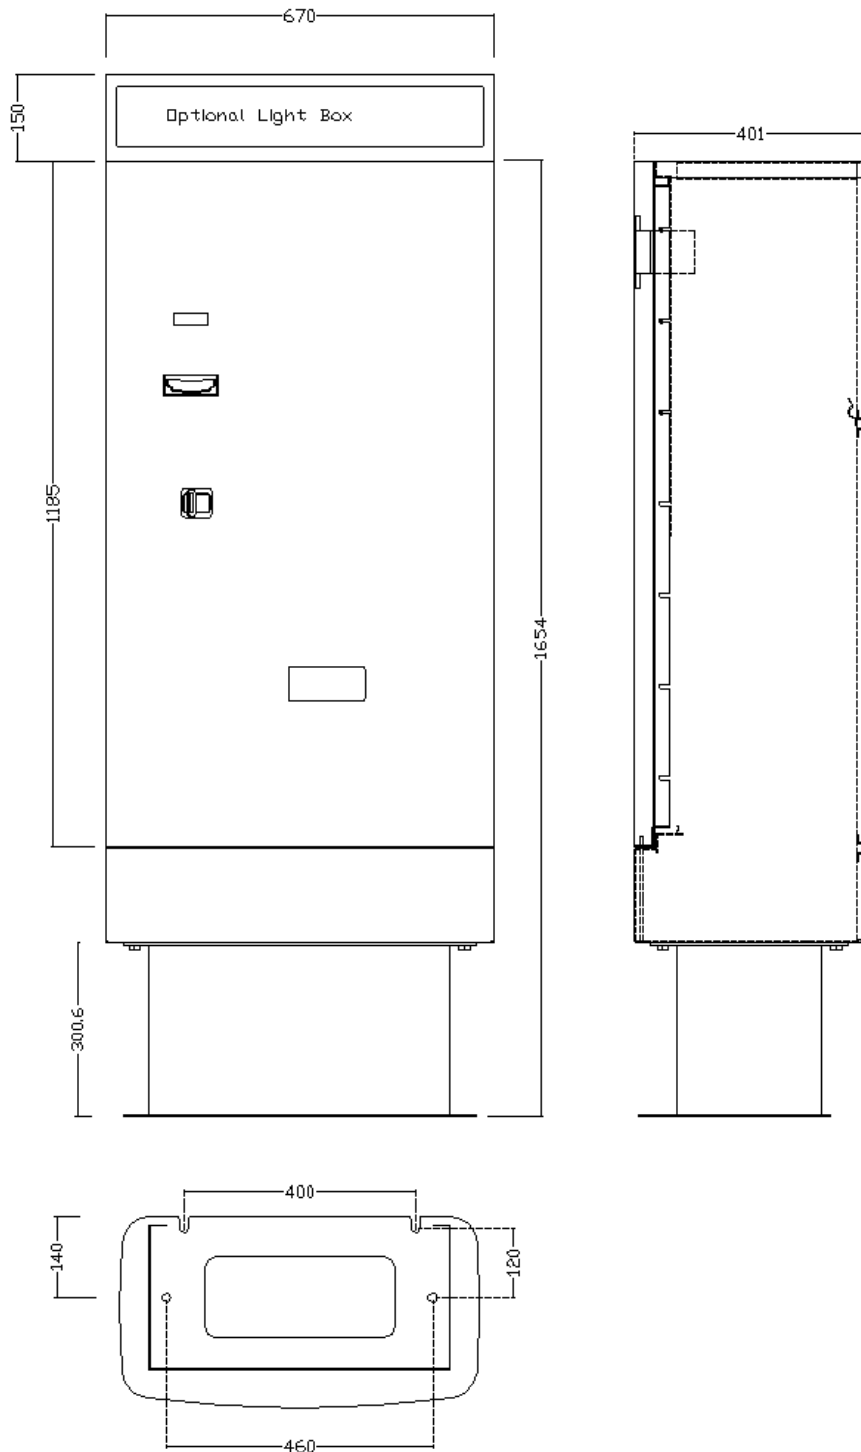

The mounting base must be fixed to a flat level surface using four M10 or M12 RAWL bolts. If the machine is mounted against a wall, only the rear fixing positions need be used: fit the two bolts into the floor, 20mm from the wall, slide the base onto the bolts and tighten bolts. The machine is attached to the base using the four M16 bolts provided. The bolts are fitted from the inside of the machine to the captive nuts in the mounting base. Power and network cables may be routed either from under the base and through the aperture in the bottom of the machine or from the back through the cable inlet hole.